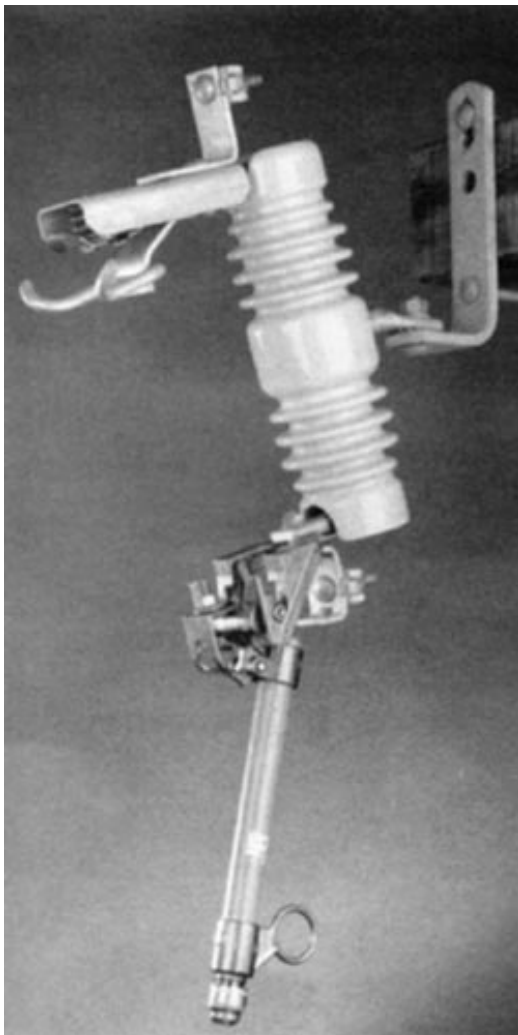



[Catalog Home](#)

Product Datasheet

CHANCE**C710143P -- Type C Standard Porcelain Cutout**

15 kV, 110 kV BIL, Standard Type C Porcelain Cutout with a 200A, 12kAIC fuseholder, parallel-groove connector and no bracket.


Product Specifications


Type	Cutout
Cutout	Standard Porcelain Cutout
System Voltage (BIL)	15 kV (110 kV)
Continuous Current	200 Amps
Terminal Connector(s)	Parallel-groove clamp (#6 solid thru 4/0 ACSR (250kcmil))
Bracket	No Bracket
Fuseholder with Mechanical Assist	No
PDF Catalog Page	Click HERE to view detailed PDF Catalog
Interrupting Current	12,000 Amps Asym.
Fuse Link Range	140A to 200A - removable buttonhead fuse link only
Maximum Design Voltage	15 kV
Nominal System Voltage	Thru 14.4kV

BIL (LIW)	110 kV
Leakage Distance	8.7" (220mm)
Lightning Impulse Withstand (Phase to Ground)	110kV
Lightning Impulse Withstand (Terminal to Terminal)	121kV
Rated Phase to Ground 60 Htz Withstand; Dry (Wet)	35kV (30kV)
Rated Terminal to Terminal 60 Htz Withstand; Dry (Wet)	39kV
Maximum Temperature Rise @ 300A	38°C
Radio Interference Voltage	Ambient @ 9.41kV
Replacement Fuseholder / 300A Blade	T710-143T
Replacement Cutout Mounting Assembly	T710-1MMP
Replacement Fuseholder Cap	E700-2146P
Drawing	Click HERE to view drawing of cutout
Material Type	Non-Standard
UPC Code	09635924008
Standard Package	1
Standard Package Unit	Each
Min Order Qty	1
Pallet Quantity	54
Weight / Ea.	14.7 lbs

Compressed Product Number

C710143P

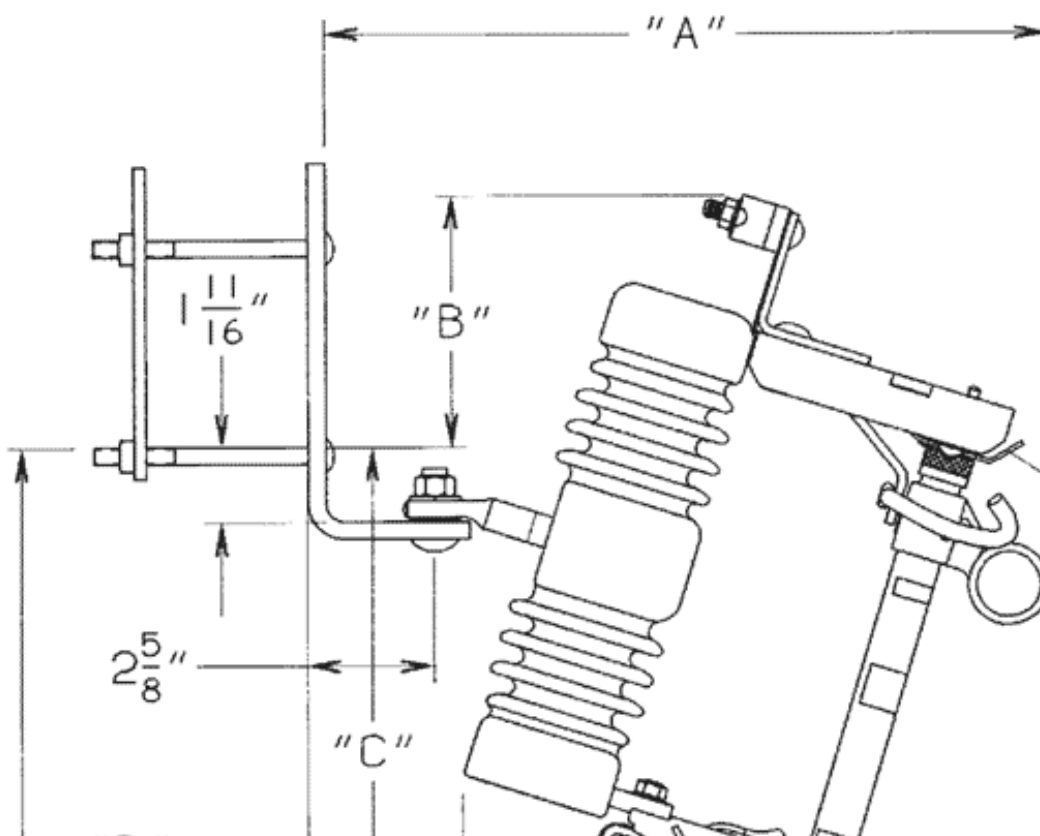

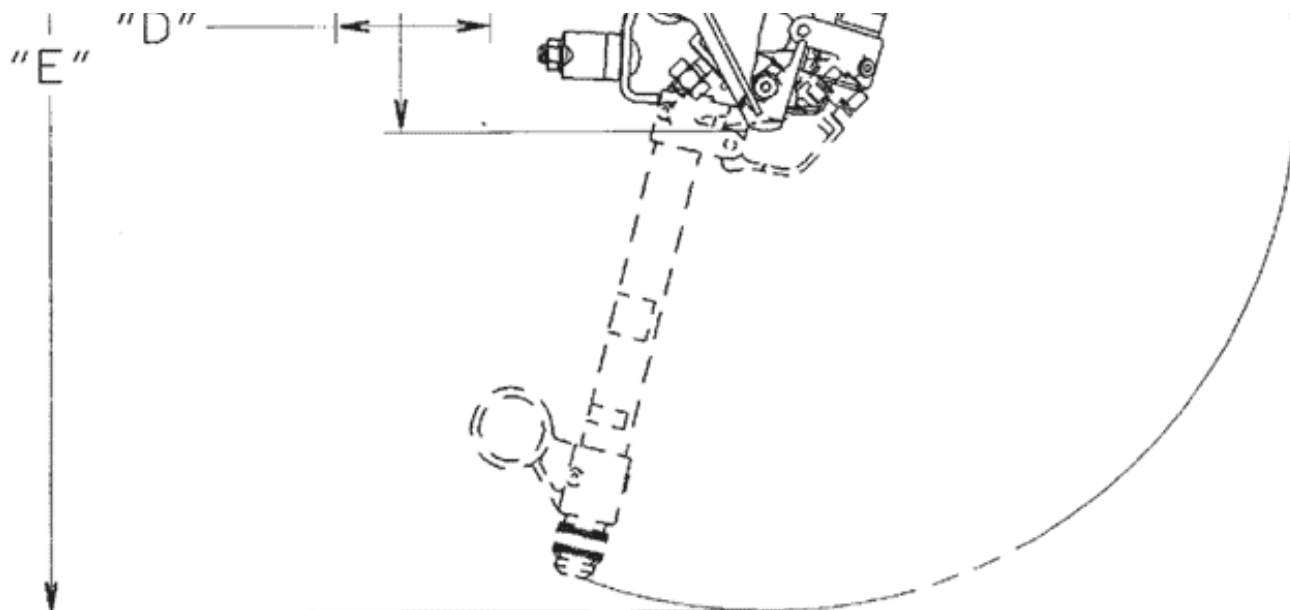

STANDARD Type C Cutout with NEMA Type B Bracket Dimensions

kV BIL	A	B	C	D	E
110	16"	5½"	10¾"	3½"	21½"
	406 mm	137 mm	273 mm	89 mm	559 mm
125	16¾"	7⅛"	12½"	3⅛"	26¾"
	416 mm	181 mm	318 mm	79 mm	679 mm
150	16¾"	7⅛"	12½"	3⅛"	26¾"
	416 mm	181 mm	318 mm	79 mm	679 mm
170	17¼"	8½"	15"	1¾"	32½"
	438 mm	216 mm	381 mm	44 mm	826 mm

Catalog Home



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

